




Naturally Driven Installations

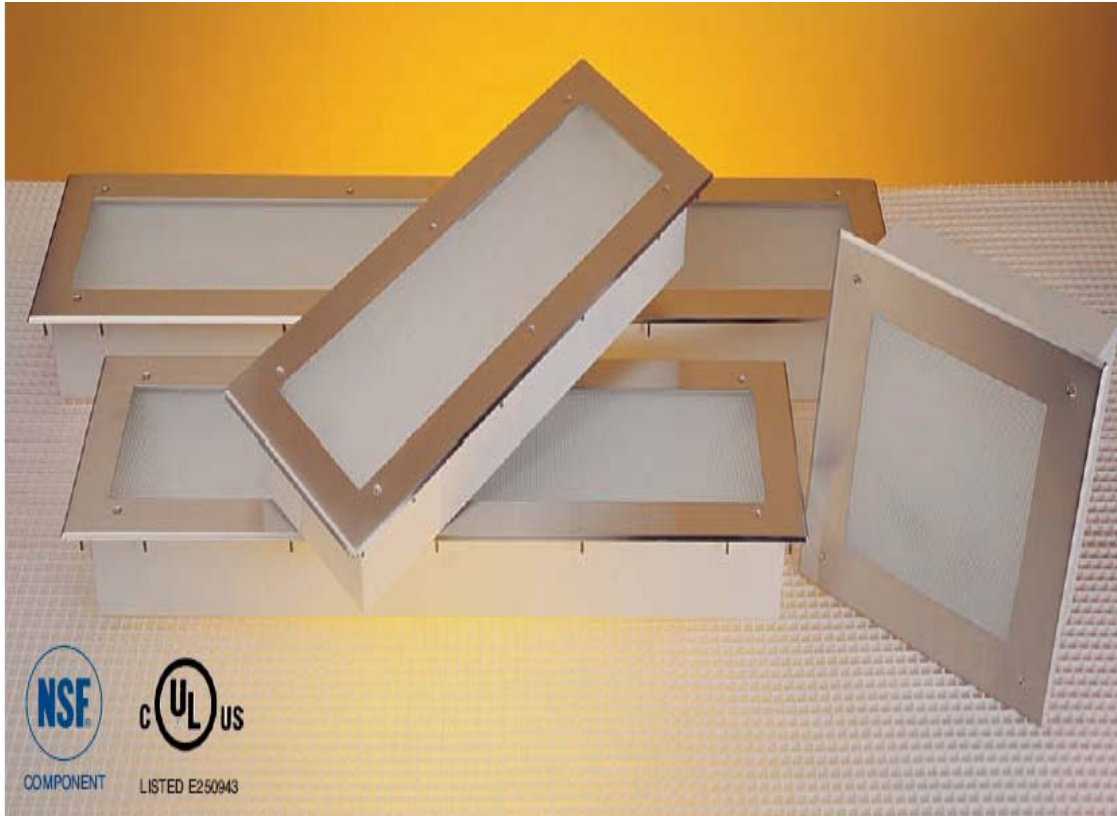

## CANOPY HOOD LIGHT FIXTURES

### RECESSED FLUORESCENT...LOW PROFILE

- NSF LISTED, UL LISTED FOR USE IN COMMERCIAL COOKING HOODS
- MEETS ALL REQUIREMENTS FOR N.F.P.A. AND N.E.C. 410
- ONLY 4-1/2" (115mm) HIGH...FOR LIMITED OVERHEAD CLEARANCE APPLICATIONS
- TEMPERED, PRISMATIC GLASS DIFFUSER WITH ONE PIECE SATIN FINISHED STAINLESS STEEL FACE FRAME TO MATCH HOOD INTERIOR

#### RECESSED FLUORESCENT CANOPY HOOD LIGHT FIXTURES

MODEL NO.	LAMPS REQUIRED	OVERALL TRIM SIZE	CUT-OUT SIZE	HOLE8 REQD	"A" DIM.
L82-1020	(2) F17T8	10-1/4" X 26-1/4" (260mm x 660mm)	8-1/2" X 24-1/2" (215mm x 620mm)	12	6" (150mm)
L82-1030	(2) F25T8	10-1/4" X 38-1/4" (260mm x 970mm)	8-1/2" X 36-1/2" (215mm x 930mm)	14	7-1/2" (190mm)
L82-1040	(2) F32T8	10-1/2" X 50-1/4" (267mm x 1270mm)	8-1/2" X 48-1/2" (215mm x 1230mm)	14	10-1/2" (265mm)

### RECESSED INCANDESCENT

- UL LISTED AND CERTIFIED FOR CANADA FOR USE IN COMMERCIAL COOKING HOODS
- MEETS ALL REQUIREMENTS FOR NFPA AND NEC 410
- NSF LISTING
- SATIN FINISHED STAINLESS STEEL FACEPLATE TO MATCH HOOD INTERIORS
- TEMPERED, PRISMATIC GLASS DIFFUSER

#### RECESSED INCANDESCENT CANOPY HOOD LIGHT FIXTURE MODEL NO. L87-1004

##### SPECIFICATIONS

- SOCKET:** Side mounted porcelain medium base
- WATTAGE:** Accepts standard 150 Watt A23 bulb maximum(not furnished)
- VOLTAGE:** Rated up to 120 Volts
- DIFFUSER:** Crystal 73 tempered prismatic glass with prisms on inside of fixture
- FACEPLATE:** One piece, stainless steel with smooth satin finish
- LOCKUP:** (4) captive stainless steel screws
- RETAINER:** Twin spring and cable for faceplate and frame
- REFLECTOR:** Die formed aluminum with satin finish
- WIRING:** Connections to socket are made in the interior removable thermal insulated wiring chamber
- BODY:** Steel recessed housing with baked white enamel finish
- MOUNTING:** (4) #10-24 x 3/4" (20mm) long threaded studs